

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	VDD - VSS	-0.3	3.6	V
Supply Voltage(LCD)	VOU - VSS	-0.3	14.5	V
Input Voltage	VI	-0.3	VDD + 0.3	V
Operating Temp.	Topr	-20	70	°C
Storage Temp.	Tstg	-30	80	°C

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	44.5 x 39.5 x 8.5	mm
Viewing Area (W x H)	39.0 x 28.0	mm
Dot Pitch (W x H)	0.282 x 0.36	mm
Dot Size (W x H)	0.252 x 0.33	mm
Weight	Approx. 14	g


ELECTRICAL CHARACTERISTICS (VDD = 3V to 3.3V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	VIH	--	0.8VDD	--	VDD	V
Input Low Voltage	VIL	--	0	--	0.2VDD	V
Output High Voltage	VOH	I _{OH} = -0.1mA	0.8VDD	--	VDD	V
Output Low Voltage	VOL	I _{OL} = 0.1mA	0	--	0.2VDD	V
Supply Current	IDD	VDD = 3.3V	--	0.4	0.8	mA
LCD Driving Voltage	V0 - VSS	Ta = 25°C	--	9.9	--	V

PIN CONNECTIONS

Pin	Symbol	Level	Function
1	VDD	3 to 3.3V	Power supply for logic and booster
2	P/S	H/L	H: Parallel mode L: Serial mode
3	VSS	0V	GND
4-8	V0-V4	--	Power supply for LCD drive
9	CAP2N	--	Capacitor 2 negative connection
10	CAP2P	--	Capacitor 2 positive connection
11	CAP1P	--	Capacitor 1 positive connection
12	CAP1N	--	Capacitor 1 negative connection
13	CAP3P	--	Capacitor 3 positive connection
14	VOU	--	DC/DC voltage converter output
15	VSS	0V	GND
16	D7(SI)	H/L	P/S=H: D0 to D7 are 8-bit data bus.
17	D6(SCL)	H/L	P/S=L: D6 is serial clock input;
18-23	D5-D0	H/L	D7 is serial data input.
24	E	H, H → L	Enable signal
25	R/W	H/L	H: Read L: Write
26	A0	H/L	H: Display data L: Instruction code
27	/RES	L	Reset signal. Active "L".
28	/CS1	L	Chip selection signal. Active "L".

BLOCK DIAGRAM

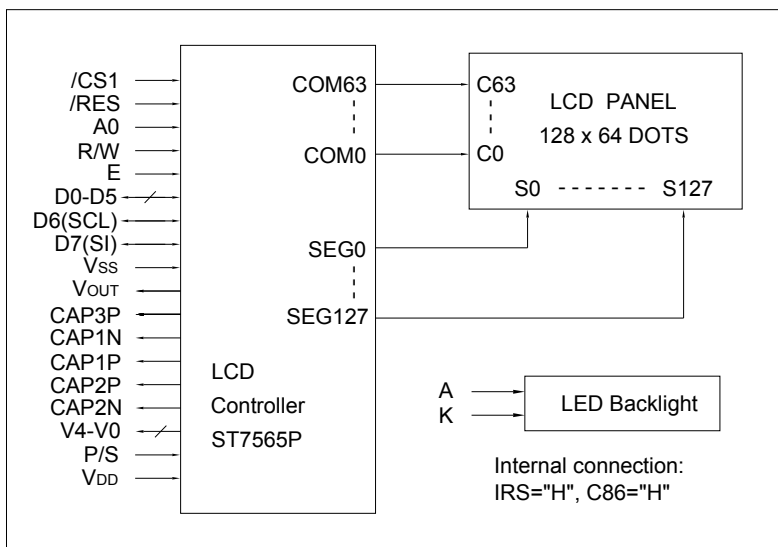

LED BACKLIGHT SPECIFICATIONS (Ta = 25°C)

Item	Symbol	Typ.	Max.	Unit
Forward Voltage	Vf	2.9	3.1	V
Forward Current	If	20	--	mA
LED Color		White		