


# LT043D-50AT

4.3", 480(RGB) x 272 TFT + touch panel, 8-bit parallel or SPI, 3.3V to 5.5V, built in Chinese font

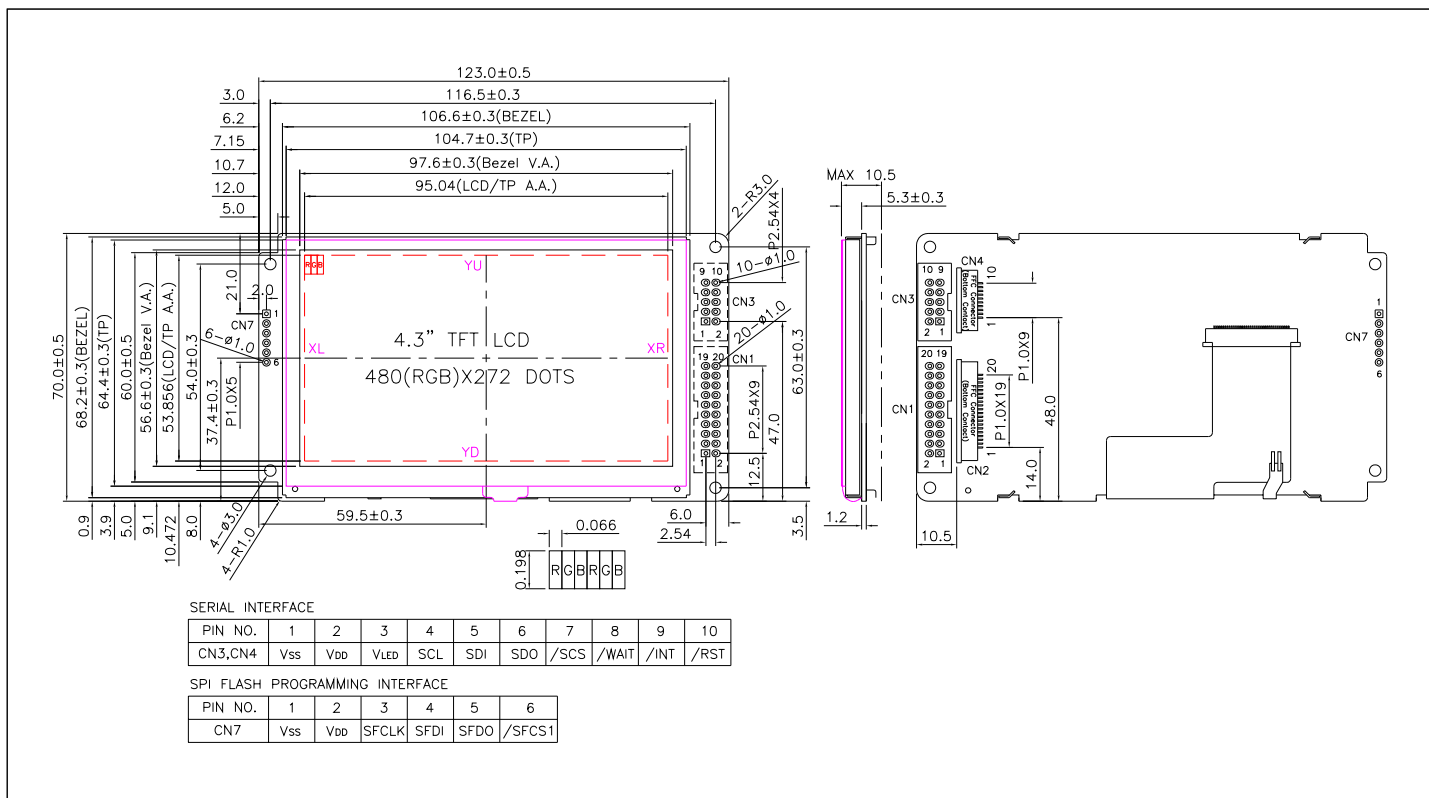

## ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage (Logic)	V <sub>DD</sub> - V <sub>SS</sub>	-0.3	5.5	V
Supply Voltage (LED)	V <sub>LED</sub> - V <sub>SS</sub>	-0.3	6.0	V
Input Voltage	V <sub>I</sub>	-0.3	V <sub>DD</sub> + 0.3	V
Operating Temp.	T <sub>opr</sub>	-20	70	°C
Storage Temp.	T <sub>stg</sub>	-30	80	°C

## MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	123.0 x 70.0 x 10.5	mm
Viewing Area (W x H)	97.6 x 56.6	mm
Active Area (W x H)	95.04 x 53.856	mm
Dot Pitch (W x H)	0.066 x 0.198	mm
Weight	Approx. 90	g

## ELECTRICAL CHARACTERISTICS (V<sub>DD</sub>=3.3V to 5.5V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	V <sub>IH</sub>	--	2.0	--	V <sub>DD</sub>	V
Input Low Voltage	V <sub>IL</sub>	--	0	--	0.8	V
Output High Voltage	V <sub>OH</sub>	I <sub>OH</sub> = -0.1mA	V <sub>DD</sub> -0.2	--	V <sub>DD</sub>	V
Output Low Voltage	V <sub>OL</sub>	I <sub>OL</sub> = 0.1mA	0	--	0.2	V
Supply Current (Logic)	I <sub>DD</sub>	V <sub>DD</sub> =3.3V to 5.5V	--	45	55	mA
Supply Current (LED)	I <sub>LED</sub>	V <sub>LED</sub> = 5.0V	--	80	100	mA

## PIN CONNECTIONS (CN1/CN2)

Pin	Symbol	Level	Function
1	V <sub>SS</sub>	0V	GND
2	V <sub>DD</sub>	3.3V to 5.5V	Power supply
3	V <sub>LED</sub>	3.3V to 5.5V	Power supply for LED B/L driver
4	RS	H/L	Data or command selection H: Command L: Display data
5	/WR (R/W)	H/L	Write signal for 8080 MCU. R/W signal for 6800 MCU.
6	/RD (E)	H/L	Read signal for 8080 MCU. Enable signal for 6800 MCU.
7	/CS	L	Chip selection signal. Active "L".
8	/RST	L	Reset signal. Active "L".
9	/WAIT	L	Wait signal output. Active "L". Outputs "L" when RA8875 is busy.
10	/INT	L	Interrupt signal output to indicate the status of RA8875. Active "L".
11	DB0	H/L	Data bus for 8-bit data bus mode. Low order data bus for 16-bit data bus mode.
12	DB1	H/L	
13	DB2	H/L	
14	DB3	H/L	
15	DB4	H/L	
16	DB5	H/L	
17	DB6	H/L	
18	DB7	H/L	
19	V <sub>SS</sub>	0V	GND
20	V <sub>SS</sub>	0V	GND

## BLOCK DIAGRAM

