


PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

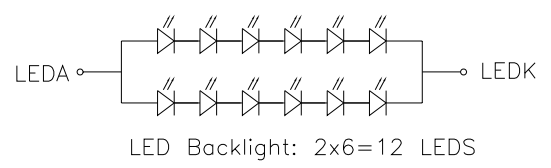

- Notes:
1. 5.0" Transmissive, Normally-White TFT LCD
 2. View Direction: 6:00
 3. LCD Drivers: ILI5960+ILI6122 or Equivalent
 4. Interface: 24-Bit Parallel RGB
 5. Touch Panel: 4-wire Resistive
 6. Operation Temp.: -20°C to 70°C
 7. Storage Temp.: -30°C to 80°C
 8. VDD=3.0V to 3.6V

LT050C-01AT

DWN.	LY	TITLE	LCM OUTLINE DIMENSION		
CHK.	LYJ	PART NO.	LT050C-01AT		
APPD.	LY	DWG. NO.	LT050C-01AT-WXA		
REV.	A	UNIT	mm	PROJECTION	
DATE	2018.12.10	SCALE	NTS	SHEET	1 OF 1